

# C/S Armourlac™ Performance Coating



Top - Housing Estate Stairwell subject to severe graffiti abuse  
Bottom - Subsequent refurbishment using Armourlac

## TYPICAL USAGE

Designed for use in aggressive environmental conditions where a coating is required to protect the natural aesthetics of the building materials used; or to provide an anti-graffiti coating to previously decorated surfaces such as:

- industrial, commercial and residential buildings
- schools
- shopping centres
- subways
- train and underground stations
- car parks
- monuments and historic buildings

## PRODUCT DESCRIPTION

C/S Armourlac™ is a highly durable, impact and abrasion resistant, zero VOC, clear product that is designed to offer protection to vulnerable surfaces from chemical and environmental attack.

Its high cross linked density produces a very resilient and non-porous coating that provides a highly resistant, non-sacrificial, anti-graffiti surface.

## FINISHES

Available in Eggshell and Gloss finishes.

## PIGMENTATION

Clear

## PERFORMANCE

C/S Armourlac™ is highly resistant to alkalis, impact, abrasion, water and inhibits a range of fungi found within the building environment.

## CLEANING

C/S Armourlac™ will withstand repeated cleaning with solvents and detergents throughout its life.


## MODEL SPECIFICATION CLAUSES

### M60 PAINTING/CLEAR FINISHING

#### 111A PERFORMANCE COATING .....

- *Manufacturer and reference: C/S Wallglaze Armourlac performance coating system by Construction Specialties (UK) Ltd, Tel: +44 (0) 1296 611000 Fax: +44 (0) 1296 399444*
- *Surface(s): .....*
- *Preparation: Dry, clean and free from grease dirt and laitance*
- *Initial Coat(s): One coat of Clear Substrate Primer\**
- *Intermediate Coat(s): .....*
- *Finishing Coat(s): Two coats of Armourlac Top Coat ..... finish at 12m<sup>2</sup>/kg*

\* **Note:** See technical information for correct choice of Substrate Primer.

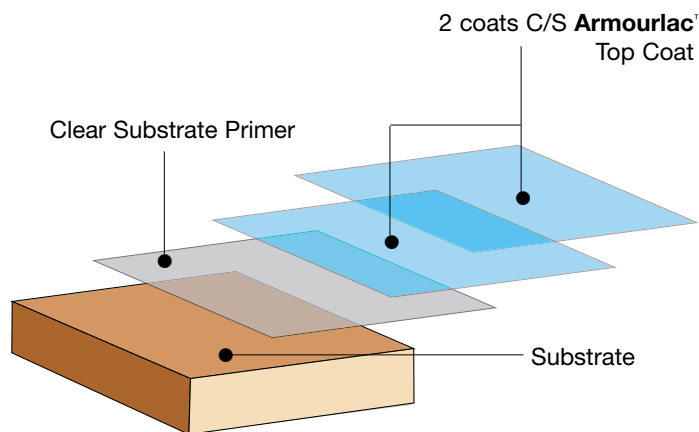

Product	Coverage Rates	Drying Times
<b>Penetration Primer**</b>	<b>8m<sup>2</sup>/kg</b>	<b>1-2 hrs</b>
<b>Armourlac Top Coat</b>	<b>12m<sup>2</sup>/kg</b>	<b>4 hrs</b>

» | Please specify a clear version of a primer for use with this product.

**Note:** Coverage Rates and Drying Times are per coat based on coating to grey faced plasterboard. When applying C/S Armourlac over previously decorated surfaces it is advised that you trial the material first.

\*\* Different Substrate Primer Options will have varying Coverage and Drying Times depending on temperature and humidity, please see technical data on Substrate Primers for further details (page 9).