

C/S TETRAS™

C/S Tetras™ Clean-off Carpet Tiles are the latest development from C/S Pedisystems. They are the ideal solution for removing moisture and dirt at the entrance, which will then protect floor coverings beyond the matwell.

Tiles can be used on their own in the building entrance or in combination with a C/S aluminium entrance matting product to extend the drying/clean-off zone.

C/S TETRAS



11
EN 14041:2004

PRODUCT FEATURES

- 500 x 500mm tile with hard wearing bitumen backing
- Suitable for recess or surface mounting
- Extremely efficient at removing and holding moisture and dirt
- Excellent wash and light fastness characteristics
- Built-in anti-static resistance
- Open yarn construction aids easy cleaning
- Available in four colour options
- Can be installed as Broadloom or Chequerboard effect
- Easy to install
- Minimum waste from installation

EXAMPLE SPECIFICATION (NBS)

**N10 GENERAL FIXTURES/FURNISHINGS/EQUIPMENT
300 ENTRANCE MATTING**

Manufacturer: Construction Specialties (UK) Limited,
1010 Westcott Venture Park, Westcott, Bucks HP18 0XB
Tel: +44 (0)1296 652800 Fax: +44 (0)1296 652888

Product reference: C/S Tetras Clean-off Carpet Tiles, complete with 13mm frame for recess mounting

Carpet colour: Obsidian Z3709

Matwell size: 5000mm wide x 6000mm in traffic direction

Mat size: To suit matwell

CARPET COLOURS



Z3709
Obsidian



Z3710
Moonstone



Z3711
Smokey Quartz




Z3712
Sapphire




ROADCHEF, STAFFORD SOUTH

SECTIONAL DETAILS

RECESS MOUNTED OPTION

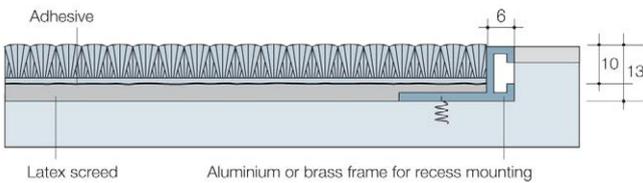

SURFACE MOUNTED OPTION

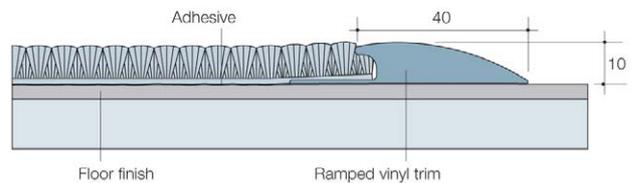

TECHNICAL INFORMATION

Tile Size:	500 x 500mm
Yarn Type:	100% Nylon Polyamide
Pile Construction:	Air entangled mono & multifilaments
Primary Backing:	Polyester/Nylon Polyamide
Secondary Backing:	Bitumen
Pile Weight:	1200g/m ²
Pile Height (ISO 1766:1986)(2005)	6mm
Total Height (ISO 1765:1986)	10mm
Total Weight (ISO 1766:8543:1986)(1998)	5kgs/m ²
Slip Resistance (EN 13893:2002)	Technical Class DS
Wear	
Lisson Tretrad	
EN 1963:TEST A:2007	5
EN 1307:2008	Class 33 Heavy Contract
Hexapod	
ISO 10361:Method B:2000 (4,000revs)	4
ISO 10361:Method B:2000 (12,000revs)	3.5

Comfort

Electrical Resistance (ISO 10965:1998)(2005)	1.4x10 ¹¹ OHMS
Anti-static (ISO 6356:2000)(2005)	≤0.2kV

Fire resistance

Radiant Panel Test	(ANSI/ASTM E 648 97/NFPA 253 1995)
Hot Metal Nut Test	(BS 4790:1987:1996)
	(ISO 11925-2:2002)
	(ISO 9239-1:2002)
	(ISO 13501-1)

Category 1

Low Radius

Class E_{FL}

Class B_{FL-S} 1


Class B_{FL-S} 1

Colour Fastness

Light (ISO 105-B02:1999 Method 2)	>6
Weathering (ISO 105-B04:1997 Method 2)	>7
Rubbing (ISO 105-X12:2002)	5
Organic Solvents (ISO 105-D02:1996)	5
Water (ISO 105-E01:1996)	5
Chlorinated Water (ISO 105-E03:2010)	5
Inorganic Salt Water (BS 1006:UK-TI:1990)	5
Shampoo (BS 1006:UK-TB:1991)	5
Bleach (CAMRASO E6-2:2002)	5


FRAME OPTIONS

13MM FRAME FOR RECESS MOUNTING

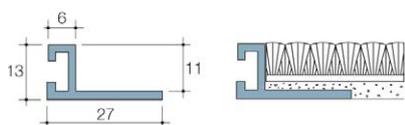

Materials: Aluminium in mill finish, black, bronze or gold anodised, or brass

CARPET EDGE GRIP FOR ABUTTING CARPET FLOORING

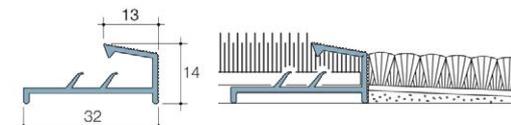


Materials: Aluminium in mill finish, black, bronze or gold anodised

RAMPED VINYL TRIM FOR SURFACE MOUNTING



Materials: Black PVC

CARPET EDGE TRIM FOR ABUTTING CARPET FLOORING

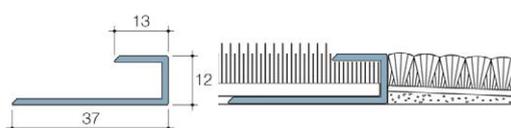

Materials: Aluminium in mill finish, black, bronze or gold anodised

Note: Illustrations not to scale